



G2669 PHONES AMPLIFIER



Technical Data

Desktop Aluminium 105mm (130mm) x 40 mm x 100mm
9-36V-DC / 3W

Phones Amplifier :

Inputs : XLR-3 female balanced 20kOhm
Outputs : phones / max. 30 Ohm load
max. input level : 22dBu
THD+N : < 95dB
Noise : < 95dBu
Gain : +3dB

Headset Connector :



| XLR-5 female | | XLR-3 male | | |
|--------------|----------|------------|--------|--------------|
| Pin1 | GND | Pin1 | intern | GND |
| Pin2 | straight | Pin2 | | |
| Pin3 | straight | Pin3 | | |
| Pin4 | | | intern | Phones-Out-L |
| Pin5 | | | intern | Phones-Out-R |


Connector : Suppy / GPI-MUTE

connector type : RIACON
pinning : Pin 1 9-36V-DC
Pin 2 GND
Pin 3 GPI-MUTE
Pin 4 GPI-GND

Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2017 (All Rights Reserved)

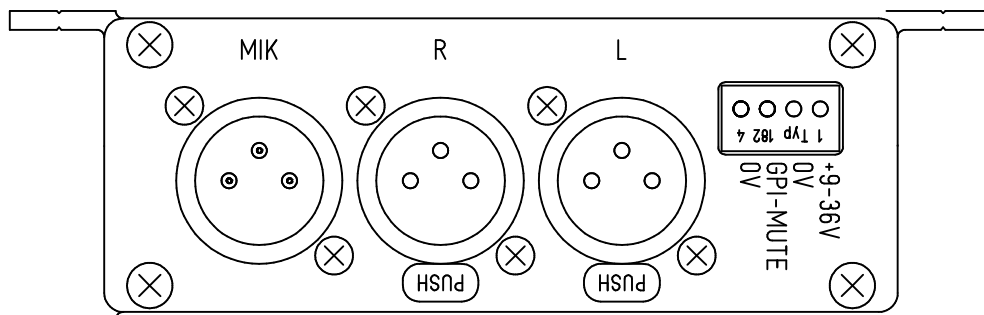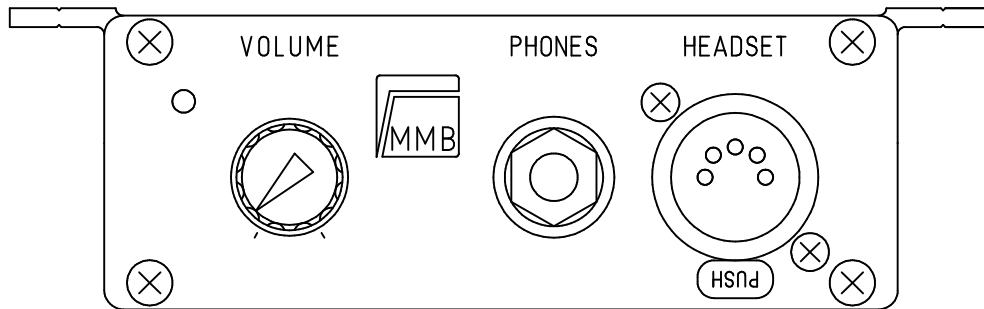

| | | | | Maßstab: 1:1  | G2669 |
|-------|----------|---------|----------|---|---------|
| | | | | | Ansicht |
| | | | | Frd.-Zehng.: Ansicht | |
| | | | | | |
| Index | Datum | Name | Änderung | | |
| Gez. | 07.04.17 | Guersan | | | |
| Erst. | | | | | |
| Gepr. | | | | | |