



G2692 PHONES AMPLIFIER



Technical Data

Desktop Aluminium 105mm (130mm) x 40 mm x 100mm
9-36V-DC / 3W

Phones Amplifier :

Inputs : XLR-3 female balanced 20kOhm
Outputs : phones / max. 30 Ohm load
max. output level : 15dBu @ 0dBFS
THD+N : < 82dB
Noise : < 82dBu
Gain : +3dB

MIK – loop

XLR-3 female XLR-3 male

Pin1	straight	Pin1
Pin2	straight	Pin2
Pin3	straight	Pin3



Connector : Suppy / GPI-MUTE


connector type : RIACON

pinning :	Pin 1	9-36V-DC
	Pin 2	GND
	Pin 3	GPI-MUTE
	Pin 4	GPI-GND

Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2017 (All Rights Reserved)

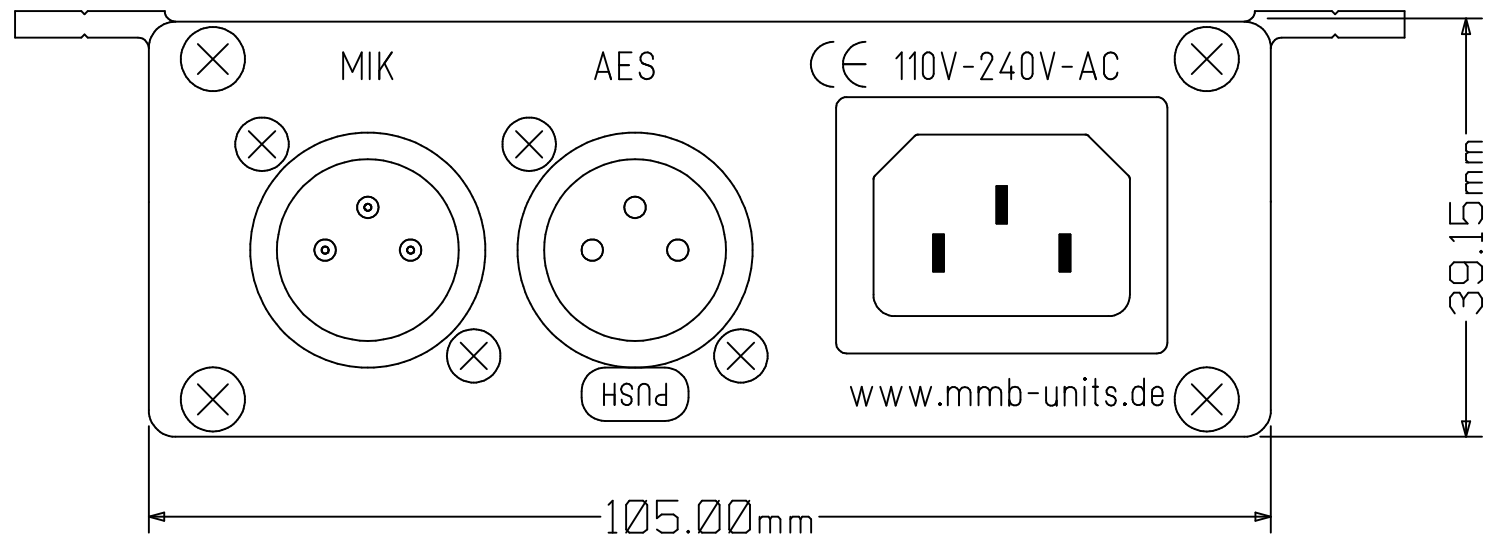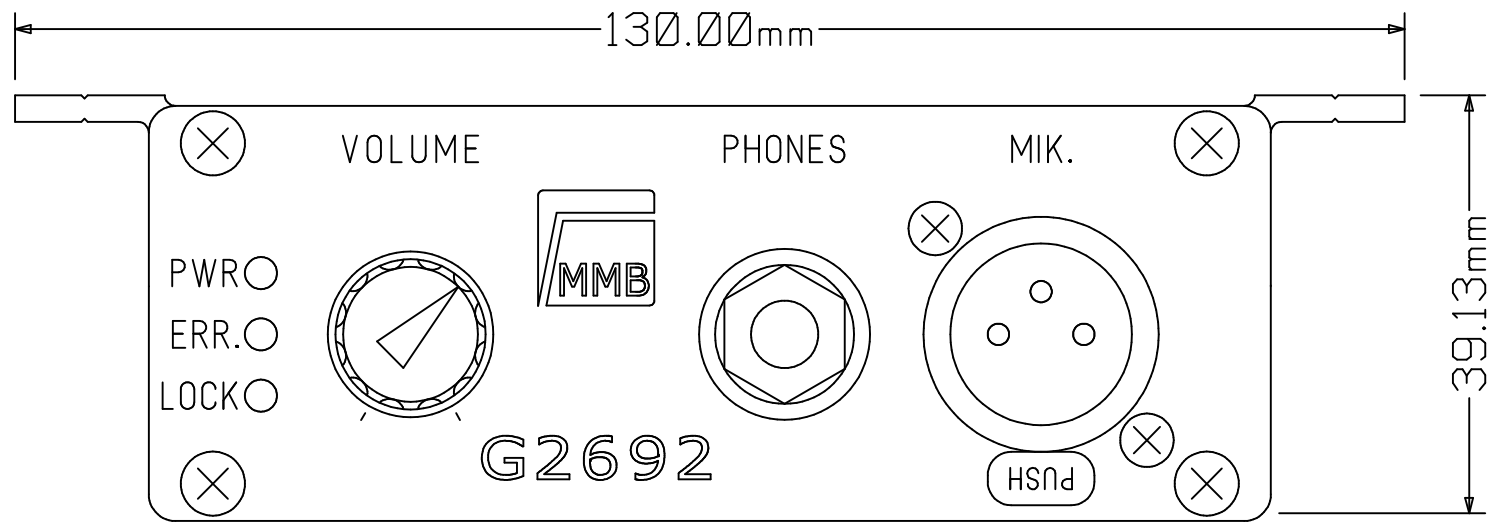

				Maßstab: 1:1	G2692	
					Ansicht	
					Frd.-Zchnng.:	
						Ansicht
Index	Datum	Name	Änderung			
Gez.	09.06.21	Guersan				
Erst.						
Gepr.						