



G2693 PHONES AMPLIFIER



Technical Data

Desktop Aluminium 105mm (130mm) x 40 mm x 100mm
9-36V-DC / 3W

Phones Amplifier :

Inputs : XLR-3 female AES 110-Ohm
Outputs : phones / max. 30 Ohm load
max. output level : 15dBu @ 0 dBFS
THD+N : < 82dB
Noise : < 82dBu
Gain : 0dB



MIK – loop


XLR-3 female		XLR-3 male
Pin1	straight	Pin1
Pin2	straight	Pin2
Pin3	straight	Pin3

Connector : Suppy / GPI-MUTE

connector type : RIACON

pinning :	Pin 1	9-36V-DC
	Pin 2	GND
	Pin 3	GPI-MUTE
	Pin 4	GPI-GND

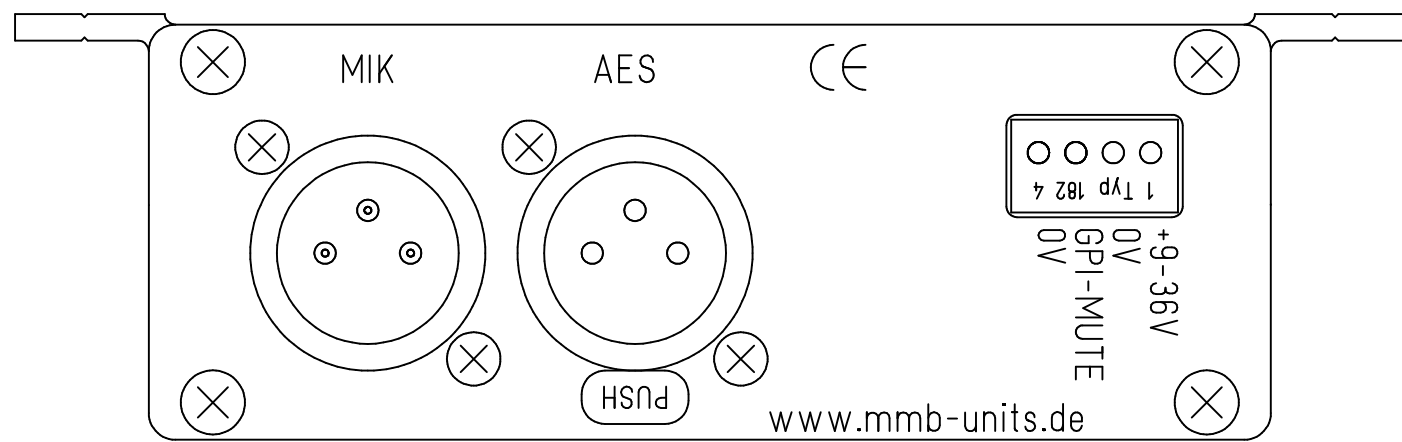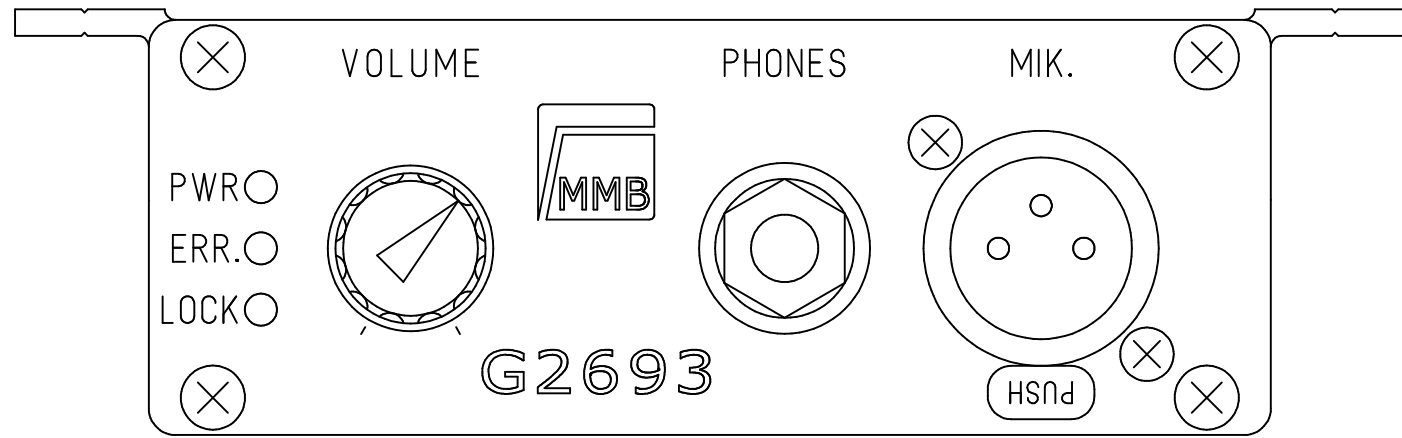

				Maßstab: 1:1	G2693
					Ansicht
					Frd.-Zchnng.:
Index	Datum	Name	Änderung		Ansicht
Gez.	09.06.21	Guersan			
Erst.					
Gepr.					