



## G9201



### Eingänge :

Impedanz : 20k-Ohm +6dBu (nom.)  
Max. Pegel : 15dBu

### Ausgänge :

Impedanz : 50-Ohm +6dBu (nom.)  
Max. Pegel : 6dBu int. Limiter

### Stromversorgung:

110V-240V AC / 6W

### Maße :

125mm x 135mm x 95mm

### Gewicht :

800 Gramm

### GPIO D-SUB 9pol. Female:




GPI-CUT	Pin1 (GPI)	Pin5 (Bezug GND)
GPO	Potentialfrei	Pin2 , Pin 3

### Lieferumfang:

Schwanenhalsmikrofon

### Product Information

This document contains information for a MMB product.  
MMB GmbH reserves the right to modify this product without notice.  
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2018 (All Rights Reserved)

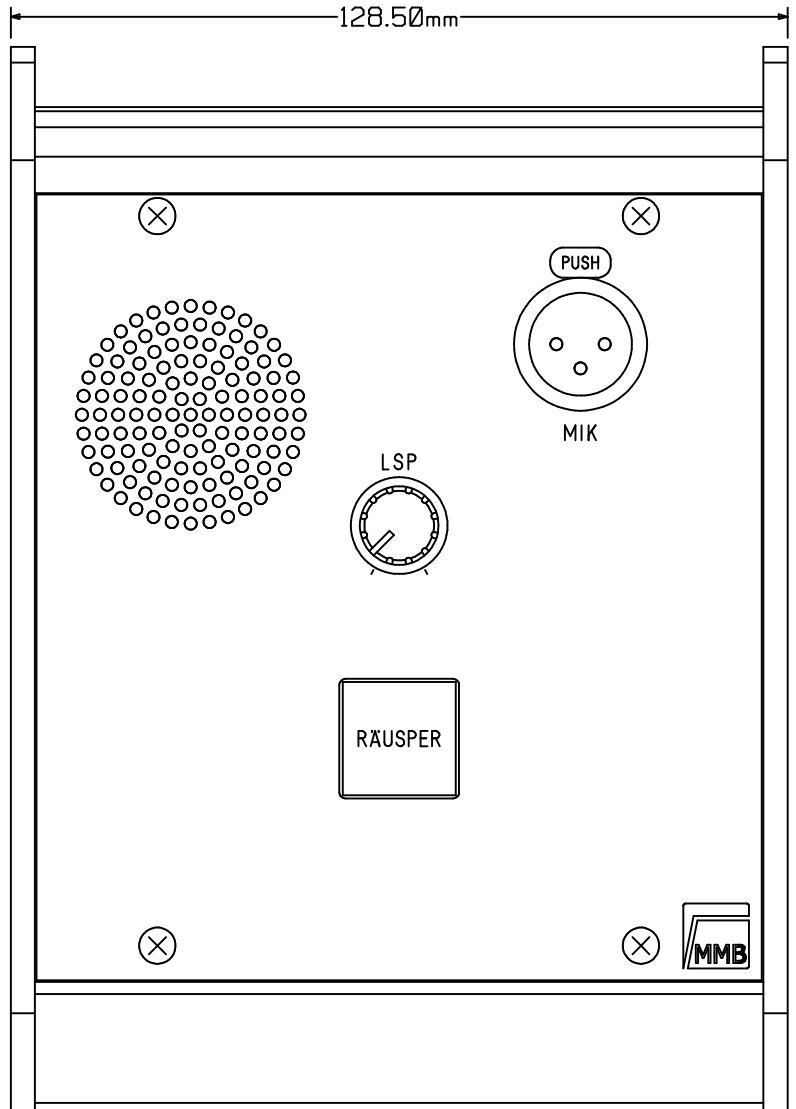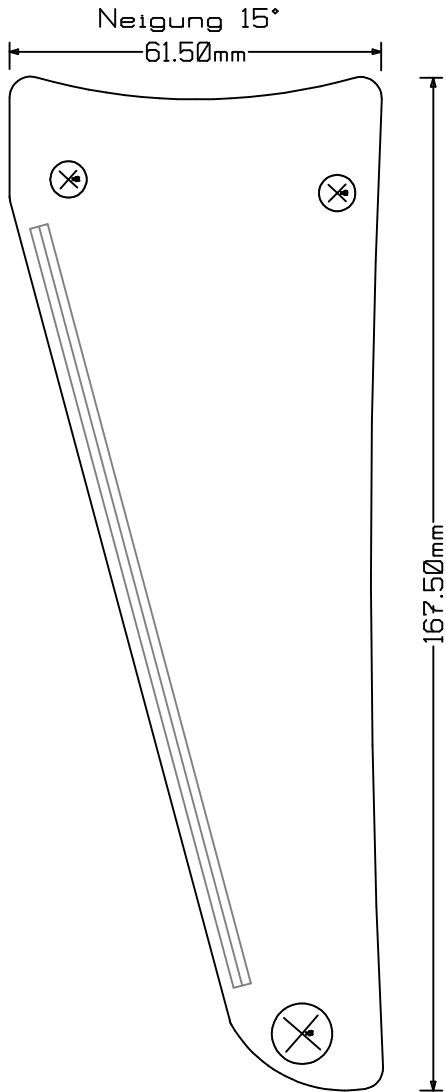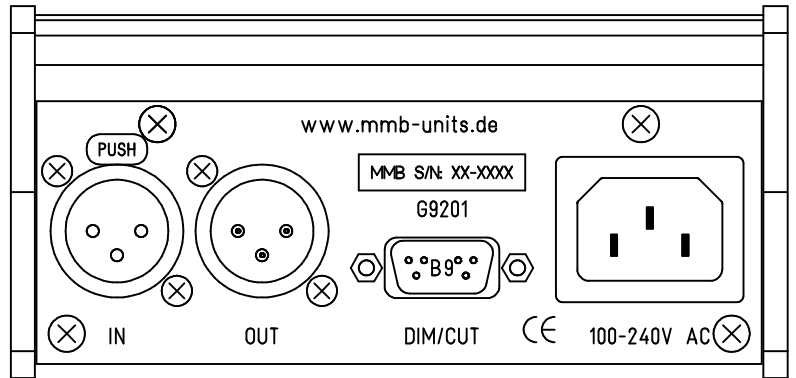

Index	Datum	Name	Änderung
Gez.	31.05.18	Riedel	
Erst.			
Gepr.			

Maßstab: 1:1



G9201 KDO Sprechstelle

Ansicht

Frd.-Zchnng.:

G9201 Ansicht