



S39589 Formatwandler



AES > AES3iD


Eingangs-Impedanz :	110-Ohm / Trafo
Eingangspegel Min. :	240mV [p-p]
Signalfluss :	Transparent 44.1-96kHz
Ausgangs-Impedanz :	75-Ohm / Trafo
Ausgangspegel :	1,3V [p-p]
Jitter :	< 2ns

AES3iD > AES

Eingangs-Impedanz :	75-Ohm / Trafo
Eingangspegel Min. :	240mV [p-p]
Signalfluss :	Transparent 44.1-96kHz
Ausgangs-Impedanz :	110-Ohm / Trafo
Ausgangspegel :	> 3,1V [p-p]
Jitter :	< 2ns

Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2018 (All Rights Reserved)

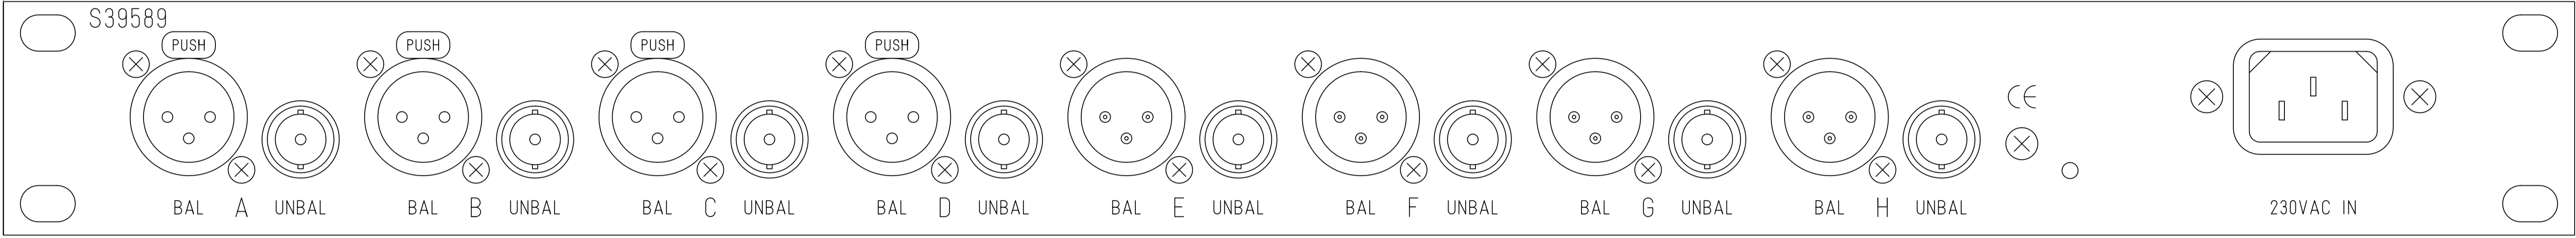

60mm-Tief



AUDIO INTEGRATED UNITS MMB GmbH © 2013

Gez.	Datum	Name	Maßstab
	30.03	Guersan	1:1,25

S39589