



S63074 PHONES AMPLIFIER



Technical Data

Desktop Aluminium 148mm x 44mm x 140mm
110V...240V-AC / 3W

Phones Amplifier :

Inputs : XLR-3p. Female AES 110-Ohm Transformer
Frame-Rate : 44.1kHz ... 96kHz
Sensitivity : < 240mV

Outputs : phones / max. 30 Ohm load
max. output level : 15dBu @ 0dBFS
THD+N : < 82dB
Noise : < 82dBu
Gain : 0dB






Connector :GPI-MUTE


connector type : RIACON

pinning :	Pin 1	N.C.
	Pin 2	GND
	Pin 3	GPI-MUTE
	Pin 4	GPI-GND

Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2021 (All Rights Reserved)

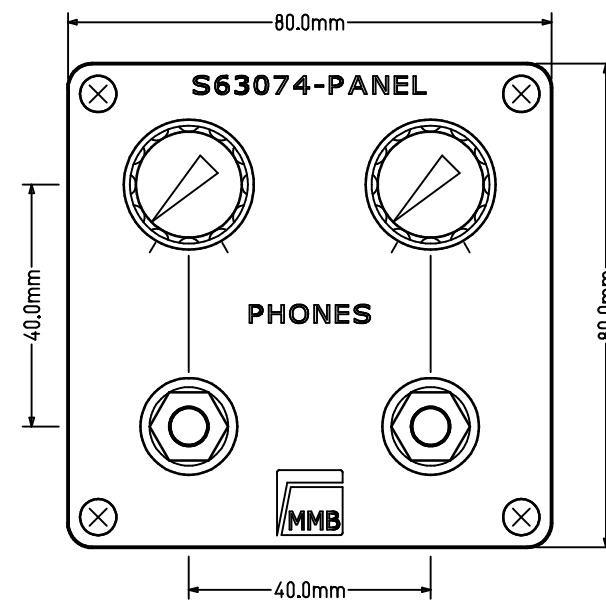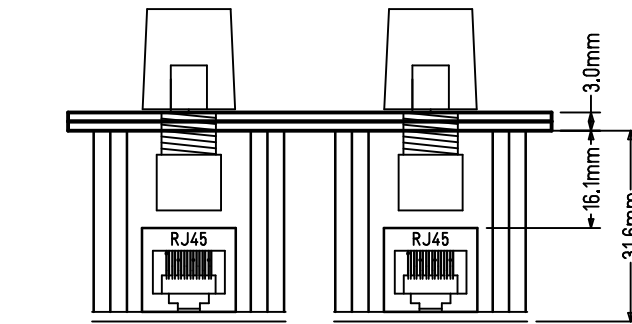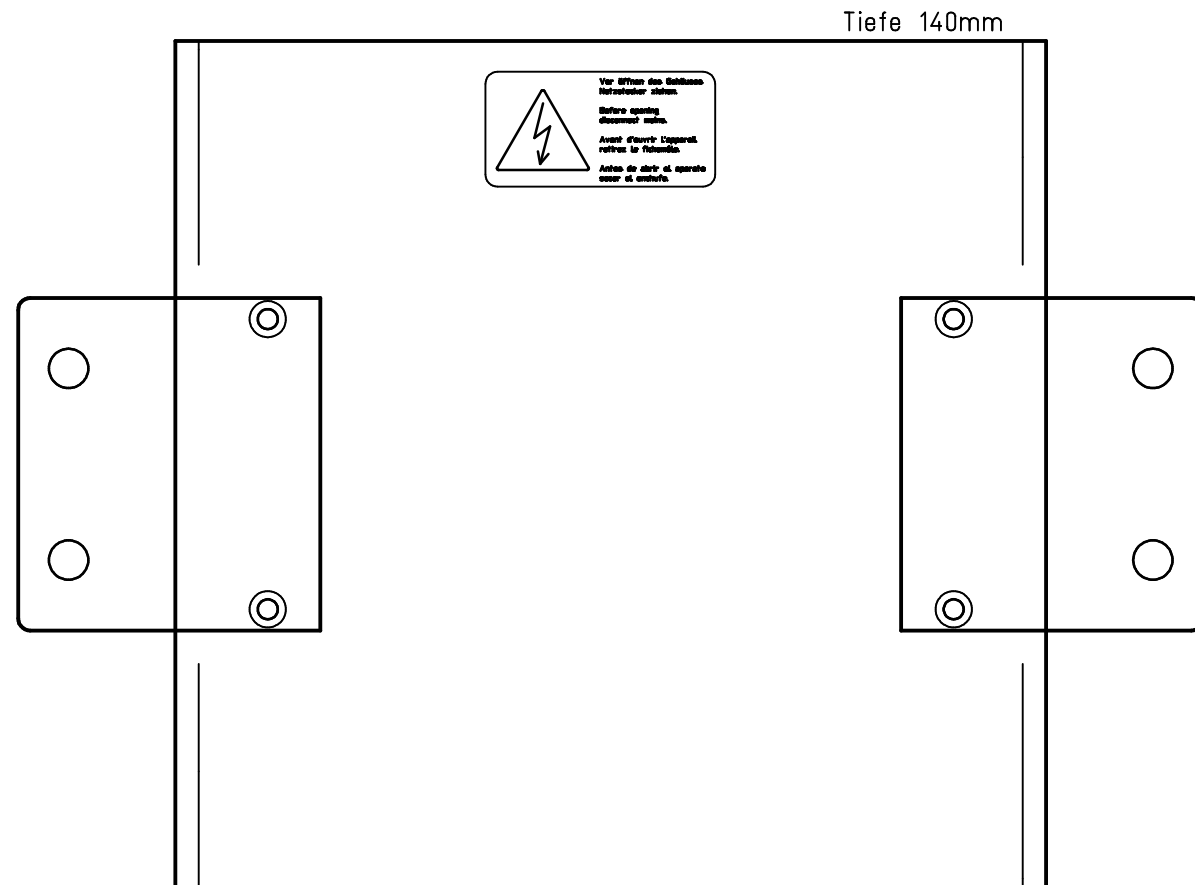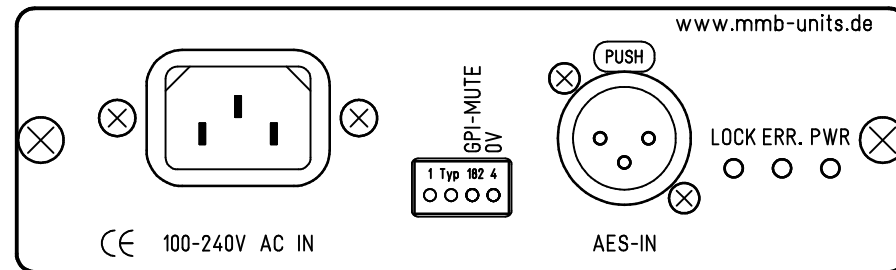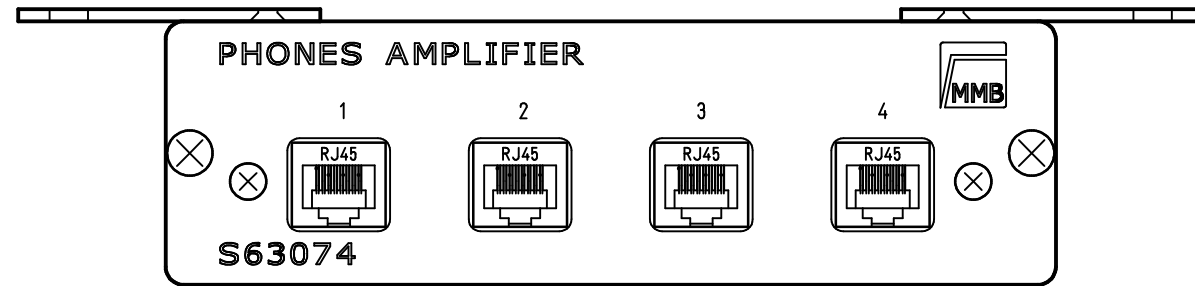

				Maßstab: 1:1.25	S63074 PHONES AMPLIFIER	
					Ansicht	
					Früher-Zeichung:	
					S63074 Ansicht	
Index	Datum	Name	Änderung			
Gez.	12.07.21	Riedel				
Erst.						
Gepr.						