


Tiefe 150mm

**PHONES (OPTION)**

				Maßstab: 1:1.25	T1210D
					Ansicht
					Frd.-Zchnng.:
					Ansicht
Index	Datum	Name	Änderung		
Gez.	11.05.17	Guersan			
Erst.					
Gepr.					

**T1210D AUDIO MONITORING UNIT****Maße :**

Gehäuse	19"-1HE
Einbautiefe	150mm
Farbe	Schwarz eloxiert

**Stromversorgung :**

Betriebsspannung	110-230V - 15VA
------------------	-----------------

**Eingänge :**

XLR3p.Female	Elektronisch Symmetrisch
Impedanz	20k-Ohm
Max. Pegel	22dBu

**Ausgänge Monitor geregelt :**

XLR3p.Male	Elektronisch Symmetrisch
Impedanz	50-Ohm
Max. Pegel	15dBu
THD+N	< 86dB @6dBu
Noise	< 92dBu
Frequenzgang	0,1 dB 40Hz ... 22kHz

**Ausgänge Line ungeregelt :**

XLR3p.Male	Elektronisch Symmetrisch
Impedanz	50-Ohm
Max. Pegel	15dBu

**Kopfhörerverstärker (Option) :**

Verstärkung	+3dB
Max. Last	30-Ohm
THD+N	< 80dB @6dBu
Noise	< 92dBu
Frequenzgang	0,1 dB 40Hz ... 22kHz

**GPI D-SUB-9pol. Male**


DIM	Pin2
CUT	Pin3
BEZUG	Pin1 / GND

**Audio Matrix :**

STEREO, MONO , LL, RR, PHASE(L),RL, CUT,DIM

**Product Information**

This document contains information for a MMB product.  
MMB GmbH reserves the right to modify this product without notice.  
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2017 (All Rights Reserved)

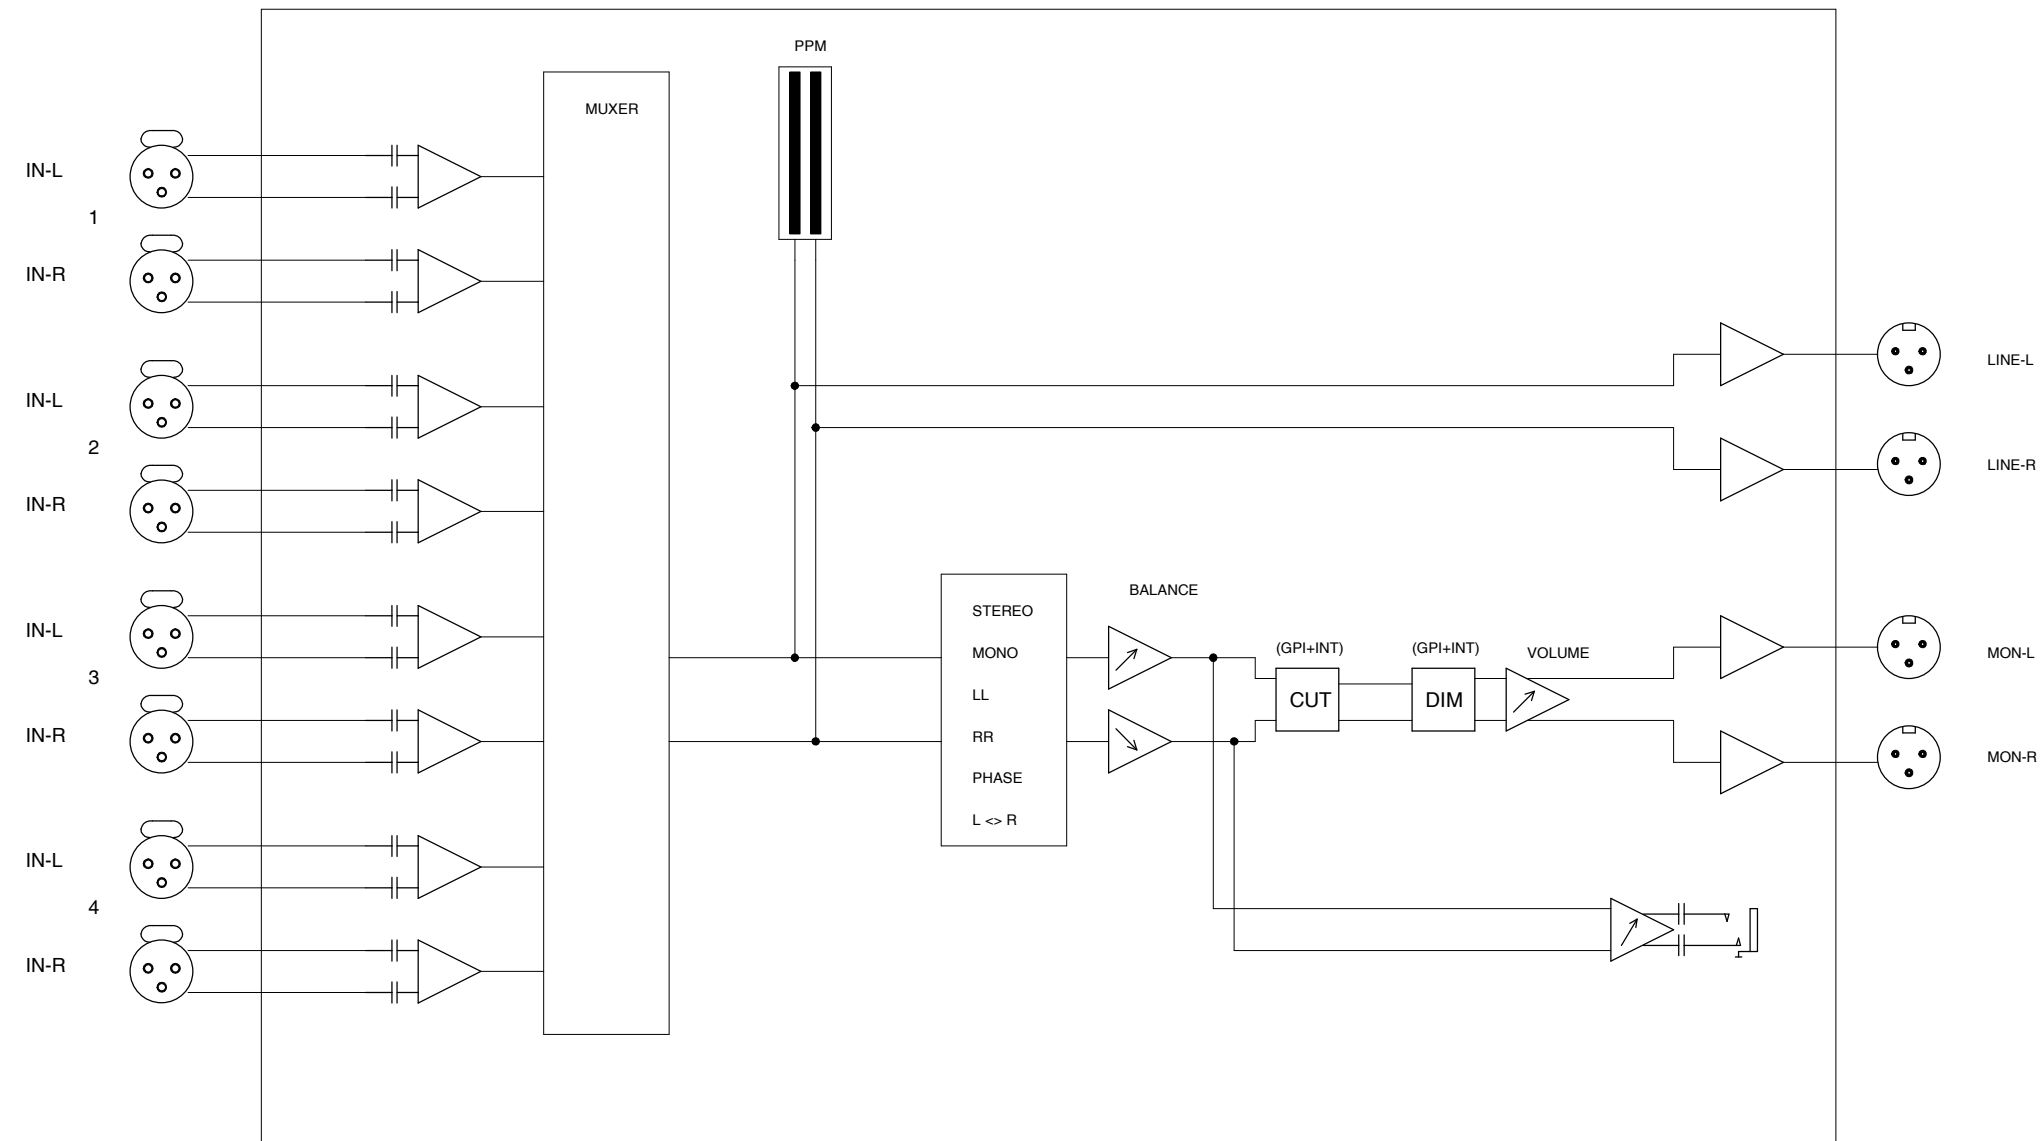

T1210

Copyright © MMB GmbH 2016 (All Rights Reserved)  
MMB GmbH reserves the right to modify this product without notice