

Index	Datum	Name	Änderung
Gez.	13.10.21	Guersan	
Erst.			
Gepr.			


Maßstab: 1:1.25	T1210E
	Ansicht
Frnd.-Zchnng.:	
	Ansicht



AUDIO INTEGRATED UNITS MMB GmbH

Heinrich-Hertz-Str. 26
Eingang 8 / Raum 59
D-25336 Elmshorn
Fon +49(0)4121 5797507
Fax +49(0)4121 5797509

T1210E AUDIO MONITORING UNIT



Maße :

Gehäuse	19"-1HE
Einbautiefe	150mm
Farbe	Schwarz eloxiert

Stromversorgung :

Betriebsspannung	110-230V - 15VA
------------------	-----------------

Eingänge :

XLR3p.Female	Elektronisch Symmetrisch
Impedanz	20k-Ohm
Max. Pegel	22dBu

Ausgänge Monitor geregelt :

XLR3p.Male	Elektronisch Symmetrisch
Impedanz	50-Ohm
Max. Pegel	15dBu
THD+N	< 84dB @6dBu
Noise	< 82dBu
Frequenzgang	0,1 dB 40Hz ... 22kHz

Ausgänge Line ungeregelt :

XLR3p.Male	Elektronisch Symmetrisch
Impedanz	50-Ohm
Max. Pegel	15dBu

Kopfhörerverstärker :

Verstärkung	+6dB
Max. Last	30-Ohm
THD+N	< 82dB @6dBu
Frequenzgang	0,1 dB 40Hz ... 22kHz

GPI D-SUB-9pol. Male


DIM	Pin1
CUT	Pin2
BEZUG	Pin5 / GND

Audio Matrix :

STEREO, MONO , LL, RR, PHASE(L),RL, CUT,DIM

Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2021 (All Rights Reserved)

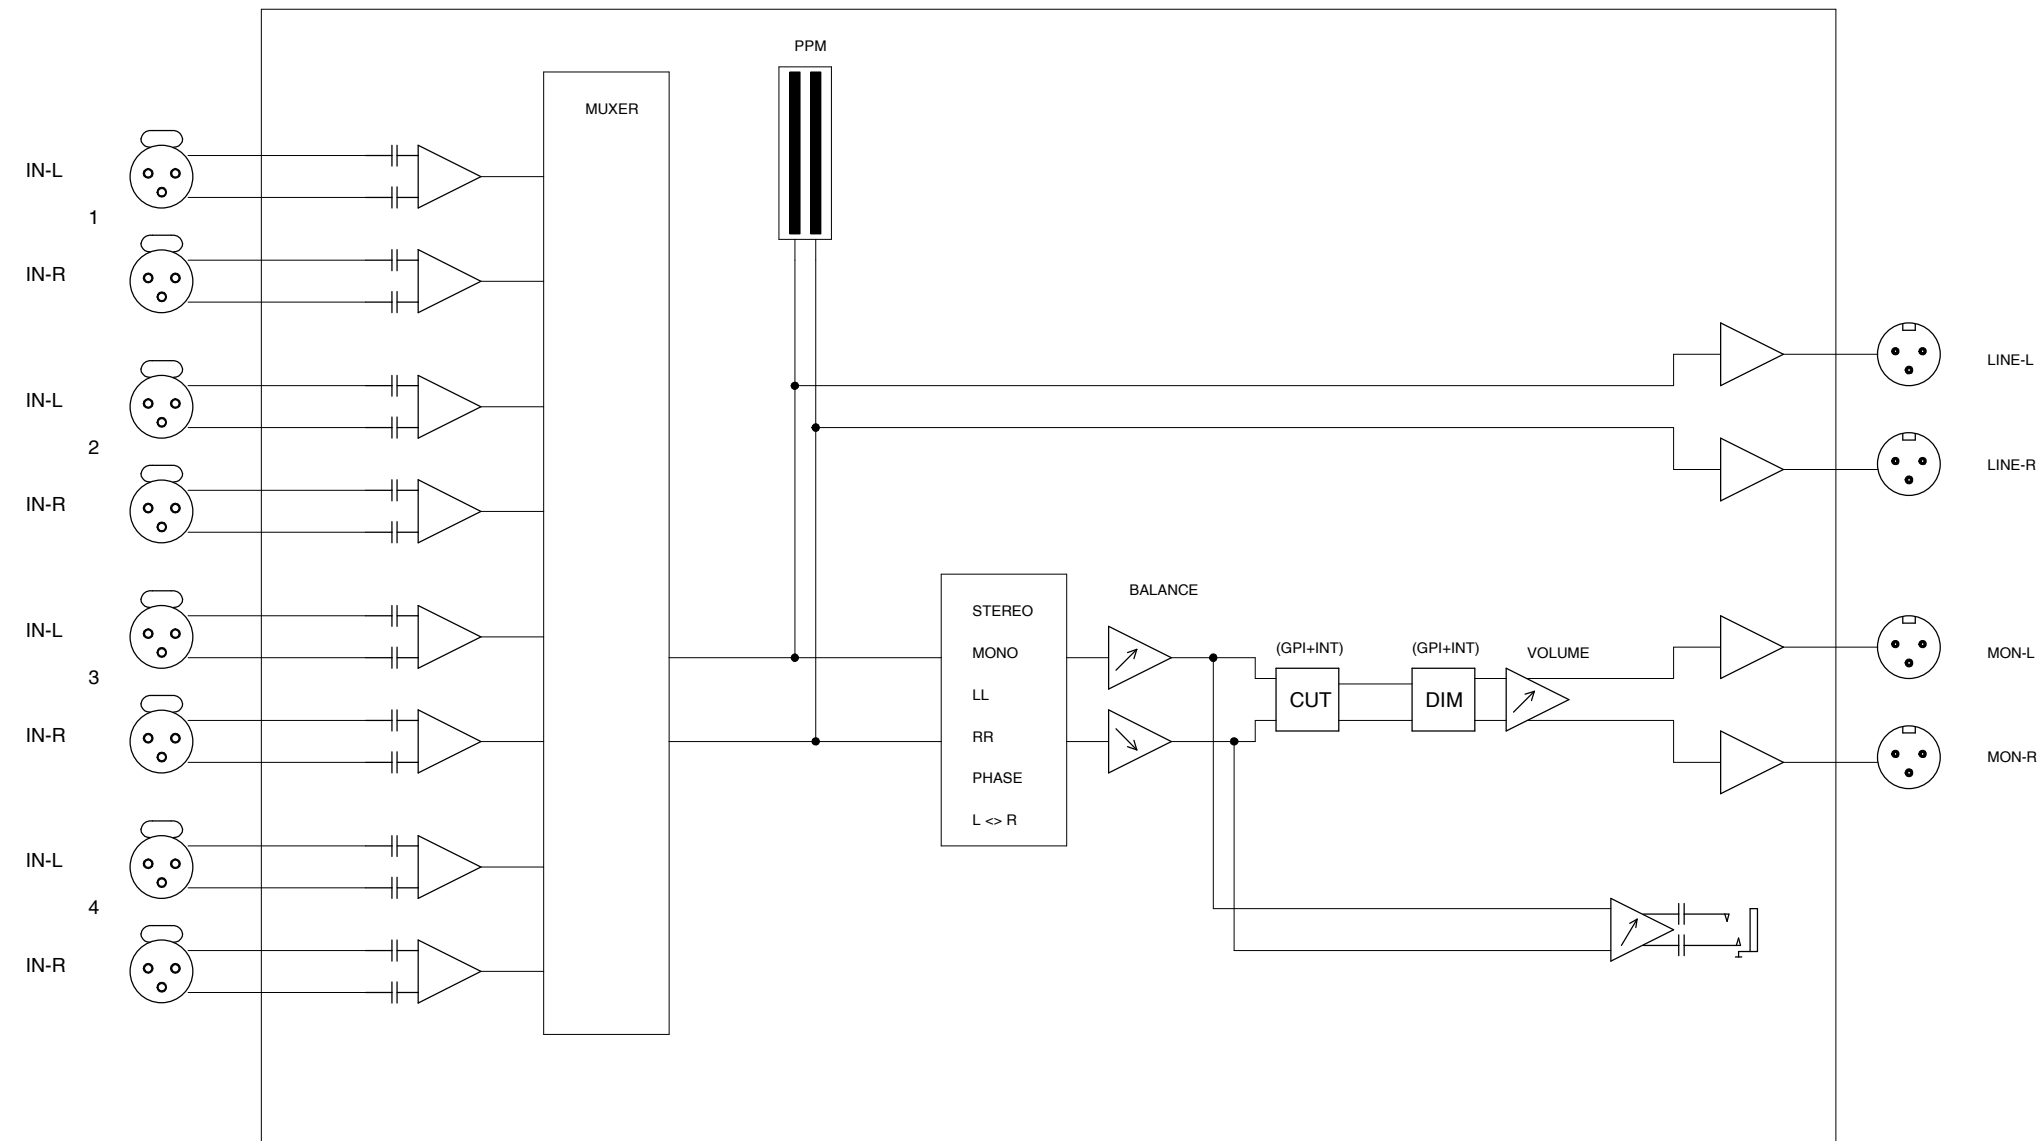

T1210

Copyright © MMB GmbH 2016 (All Rights Reserved)
MMB GmbH reserves the right to modify this product without notice