



AUDIO INTEGRATED UNITS MMB GmbH

Kleine Twiete 72
D-25436 Uetersen
Fon +49(0)4122 9790321
Fax +49(0)4122 9790329
info@mmb-units.de

T1211B MONITORING CONTROLLER



Technische Daten

19"-1U Aluminium 150mm Tief
110V-AC ... 240V-AC (15W)

Eingänge :

XLR	Analog	elektronisch symmetrisch	20k-Ohm
Cinch	Analog		47k-Ohm
Pegel Max.	15dBu		
AES	Digital	Trafoentkoppelt	110-Ohm

Ausgänge Phones :

Last	36-Ohm
Verstärkung	4dB

Ausgänge Line :

Impedanz	110-Ohm, AES
Pegel	3,8V[p-p]

Ausgänge Monitor :

Impedanz	50-Ohm, elektronisch symmetrisch
Verstärkung	-90dB ... + 0dB
THD+N	< 80dB
Max. Pegel	+15dBu @ 0dBFS


Einstellungen :

Level :	Cinch-Input -23dB ... 37dB
DIM	Bereich : -30dB ... 0dB
INPUT	Power-On Input

Pin 1	DIM
Pin 2	CUT
Pin 5	BEZUG(GND)



Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2018 (All Rights Reserved)

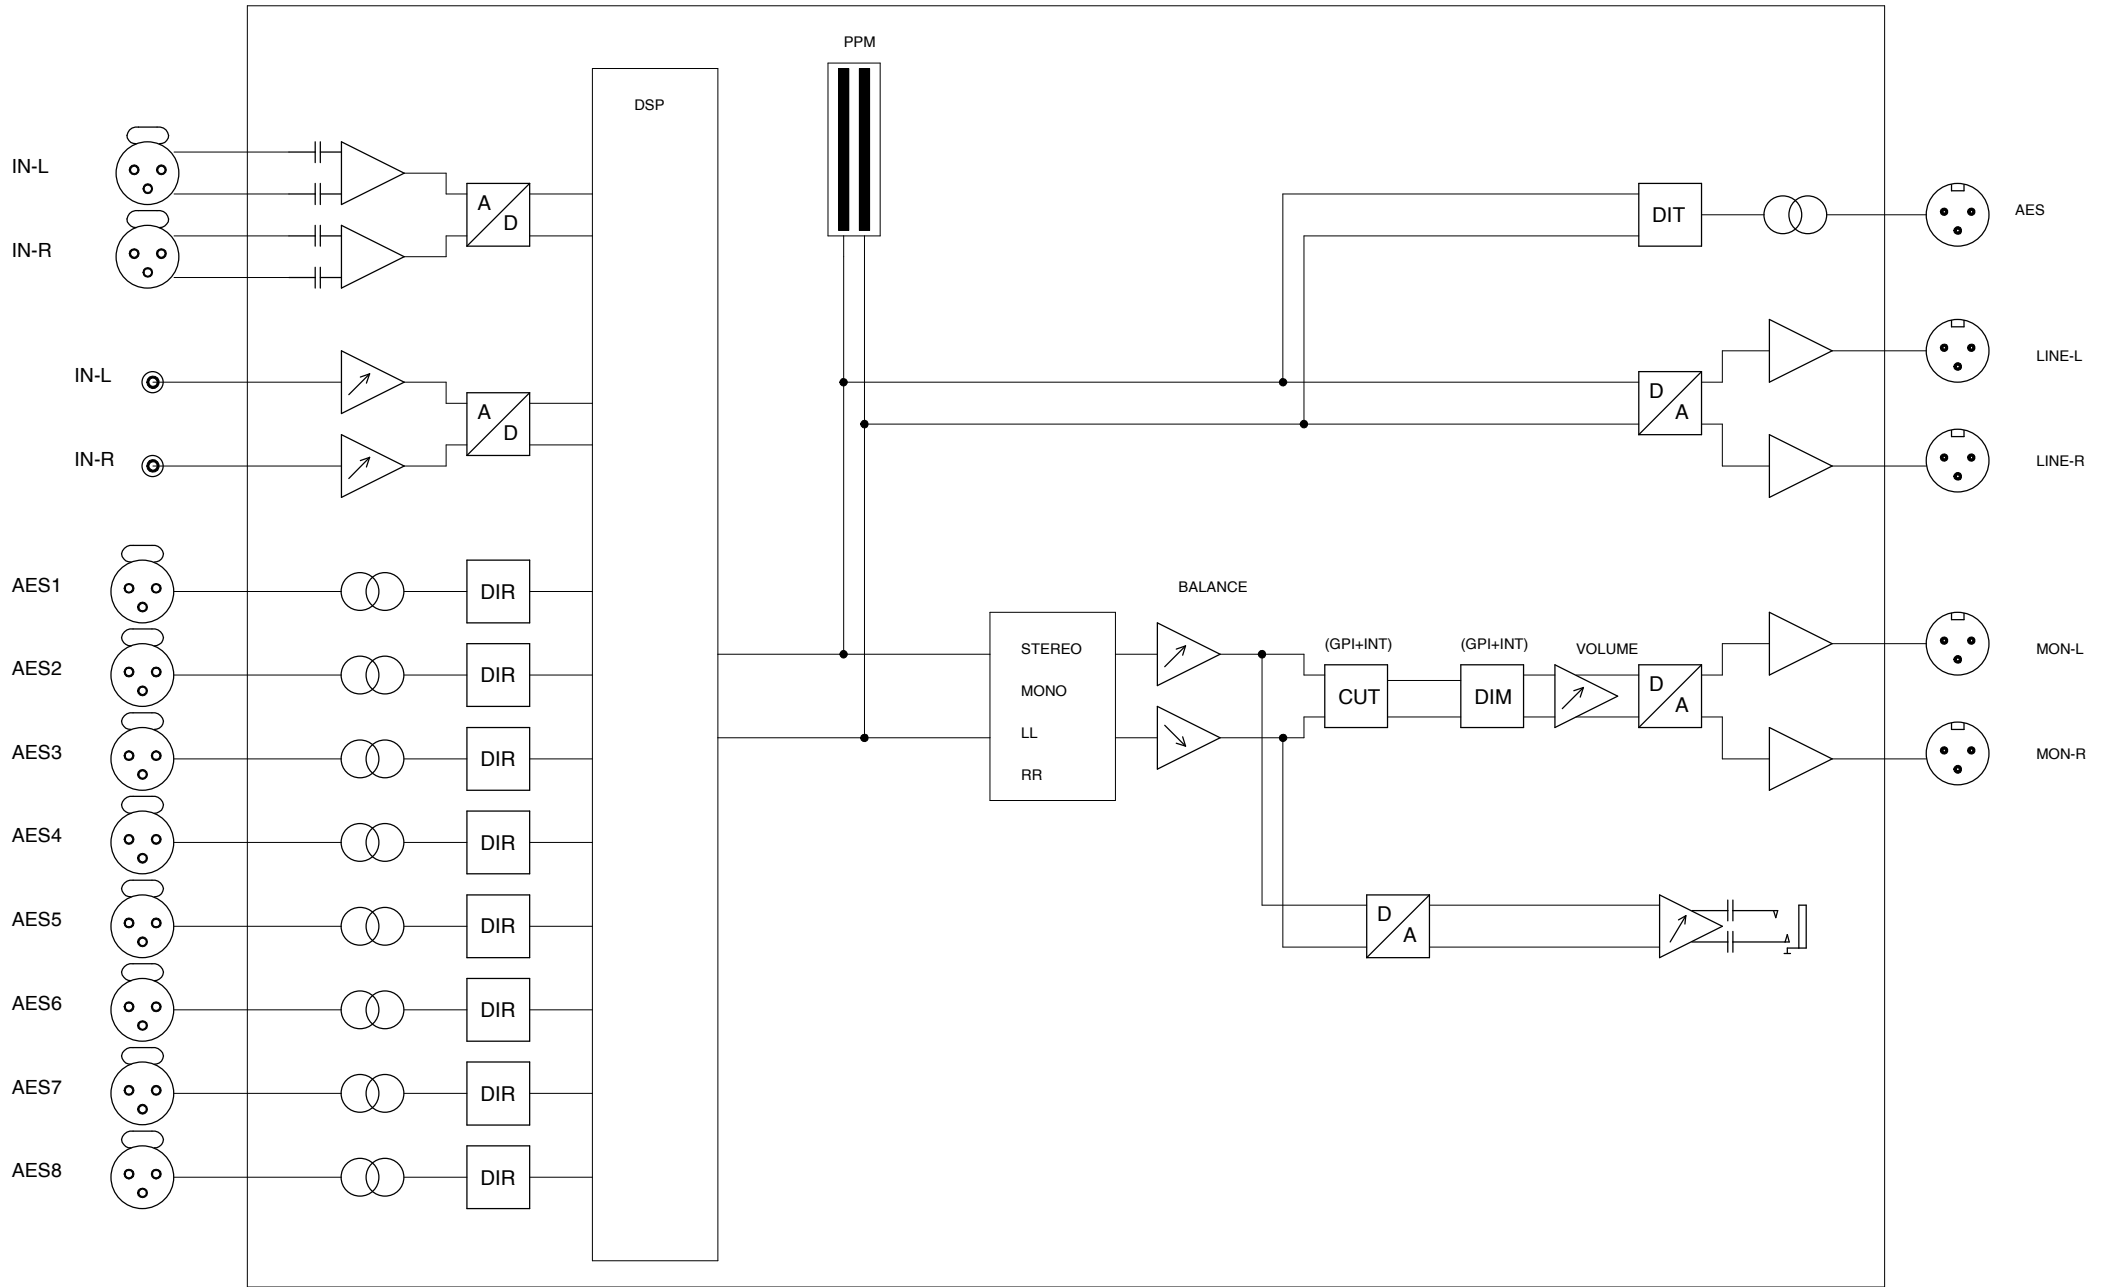

T1211


Copyright © MMB GmbH 2016 (All Rights Reserved)
MMB GmbH reserves the right to modify this product without notice

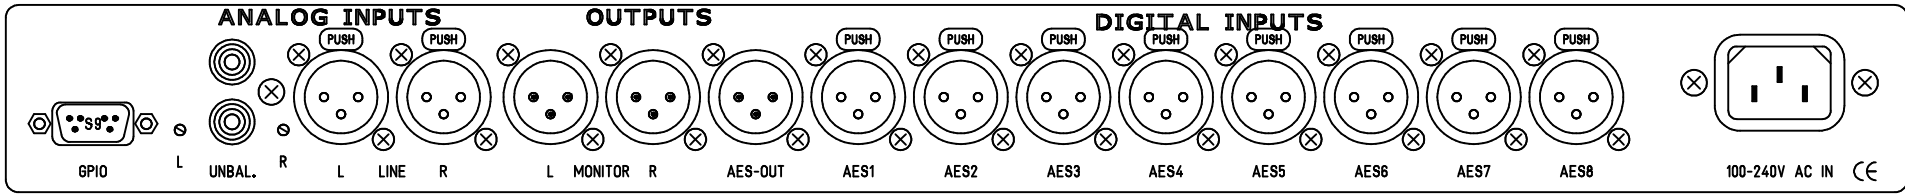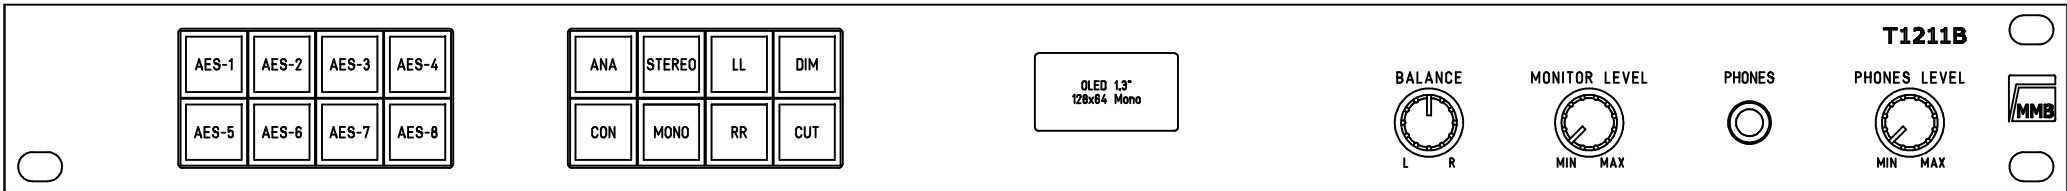

CUT, DIM

Tiefe 150mm

- Pin1. - DIM
- Pin2. - CUT
- Pin5. - GND

				Maßstab: 1:1.25	T1211B
					Ansicht
					Frd.-Zchnng.:
					Ansicht
Index	Datum	Name	Änderung		
Gez.	11.09.17	Guersan			
Erst.					
Gepr.					