



T2523 AUDIO TON GENERATOR



Outputs:

Analog	50-Ohm, elek. Balanced	
Max. Level	22dBu	
Level	-59dBu ... +22dBu	1dB per Step
Digital	110-Ohm balanced (transformer)	
Max. Level	0dBFS	
Level	-80dBFS ... 0dBFS	1dB per Step

Tone :

Sine :	40Hz, 100Hz, 500Hz 1kHz ... 16kHz / 1kHz per Step 20kHz (Pilotton)
--------	--

FS :

Rate :	44.1kHz, 48kHz, 96kHz
--------	-----------------------

UNIT :


Mech.:	19"-1U / 150mm
Supply :	110V-240V AC (15VA)

Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2015 (All Rights Reserved)



Konfiguration




Default Panel
Analog Level
Frequency

Press rotary rutton for config.



1. step
rotate adjust frequency

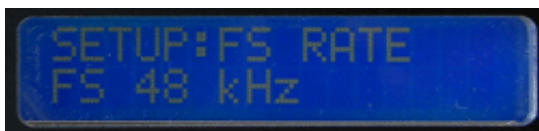

2. step
rotate adjust sample rate



3. step
rotate adjust analog level



4. step
rotate adjust digital level

Product Information

This document contains information for a MMB product.

MMB GmbH reserves the right to modify this product without notice.

Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2015 (All Rights Reserved)