



NGT 8759 POWER SUPPLY UNIT



CONFIGURABLE DEVICE :

MMB-SOFTWARE for CONFIGURE PARAMS
for UPGRADE CONTROLLER

PHYSICAL SPECIFICATIONS :

19"-1U 260mm (D) WEIGHT 3,5kg

PROPERTIES :

PSU TYPES	5V	40A	60A	100A	EACH PSU
	12V	16,7A	29A	41A	EACH PSU
	24V	8,4A	14.5A	20,5A	EACH PSU

OUTPUTS WITH SEQUENZER :

6 OUTPUTS VIA 10 POLE MOLEX-MINIFIT CONNECTORS

PIN'S	1-5	0V
	6-10	+UB

DISPLAY :

STATUS VOLTAGE, CURRENT EACH OUTPUT
STATUS ON-OFF EACH OUTPUT, TEMPERATURE

ERRORS PSU FAIL, OVERLOAD EACH OUTPUT, TEMPERATURE

FUSES :

POLYSWITCH / PTC
HOLD CURRENT 15A

GPO :

PSU-FAIL	PIN'S 1,2	CLOSED=O.K.	OPEN = FAIL
TEMPERATURE-ALARM	PIN'S 6,7	CLOSED=O.K.	OPEN = FAIL

Product Information	This document contains information for a MMB product. MMB GmbH reserves the right to modify this product without notice. Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2020 (All Rights Reserved)
---------------------	---



NGT 8759 POWER SUPPLY UNIT

CONFIGURABLE ALARM PARAMETERS :


TEMPERATURE	ALARM , MAX.TEMP
VOLATAGE	OPERATING VOLTAGE MAX. OPERATING VOLTAGE MIN.
CURRENT	OUTPUT CURRENT MAX. OPERATING CURRENT
SEQUENZER	DLEAY TIME FOR AVCTIVATE OUTPUT



DOWNLOAD :

MMB-SOFTWARE	LATEST VERSION
	http://mmb-units.de/support/index.html mail: info@mmb-units.de MMB-CONFIG-PROGRAMM


Product Information

This document contains information for a MMB product.
MMB GmbH reserves the right to modify this product without notice.
Copyright © AUDIO INTEGRATED UNITS MMB GmbH 2020 (All Rights Reserved)

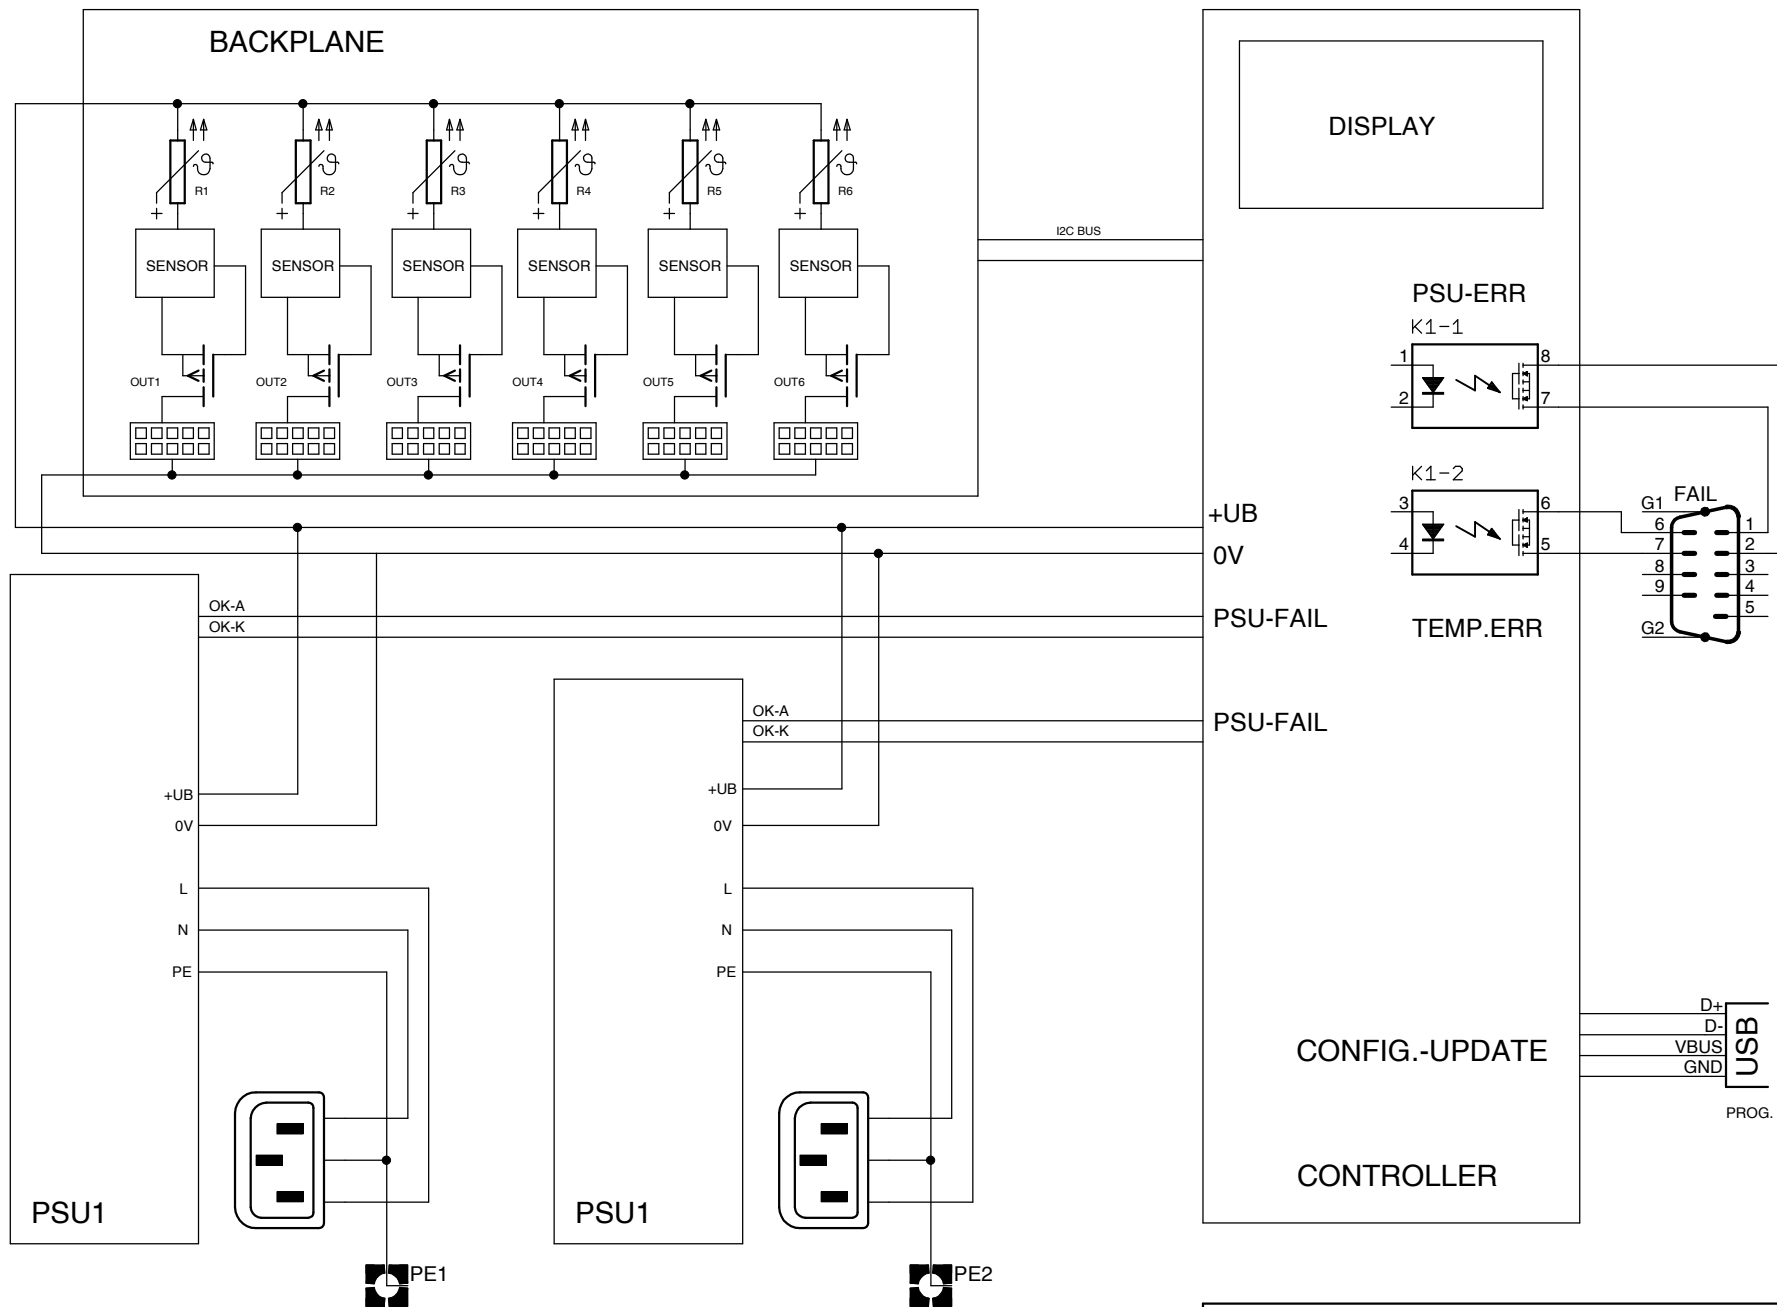

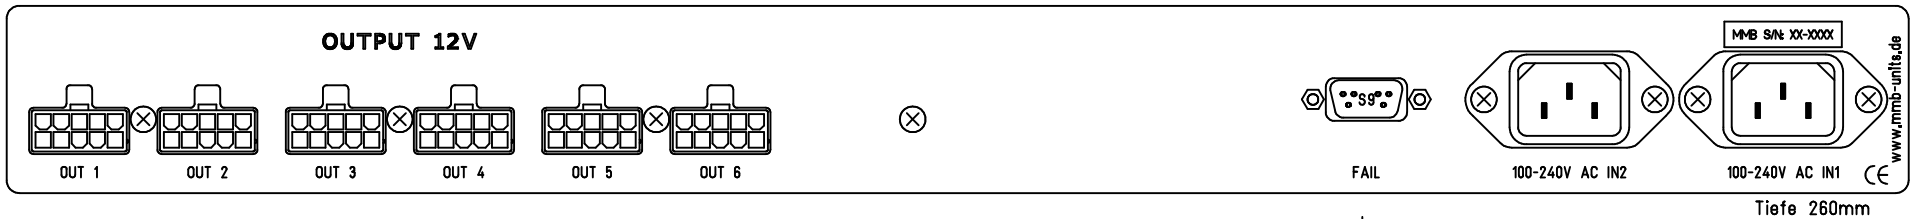

CLOSED O.K.
OPEN FAIL

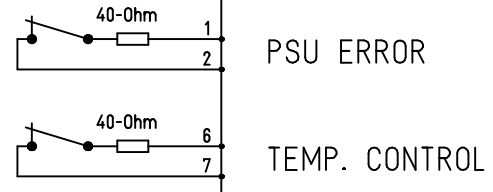

				Maßstab: 1:1.25	NGT8759 POWER SUPPLY UNIT	
					Ansicht	
					Frd.-Zchnng.:	
					NGT8759 Ansicht	
Index	Datum	Name	Anderung			
Gez.	05.05.20	Riedel				
Erst.						
Gepr.						